

NoIR


P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield ALX

Customer:	Varied
Product Designation (OPN):	ALX
Luminous Transmittance:	25%
Date of Revision:	5/12/11
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

<u>L-Rating</u>	<u>Optical Density</u>
720-840 D LB4	190-400nm 5+
720-820 I LB7 + R LB6	820-840nm 6+
>820-825 I LB6 + R LB5	720-820nm 7+
>825-832 I LB5 + RLB4	
>832-840 I LB4 + R LB3	

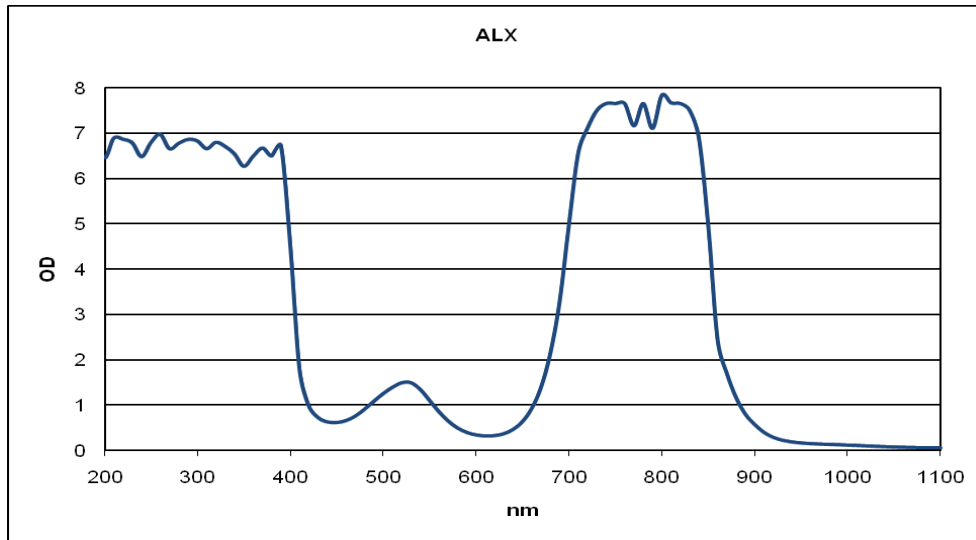


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

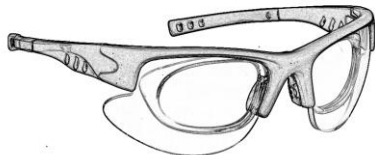

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.