

NoIR

P.O. Box 159 South Lyon Michigan 48178
Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield AXX

Customer:	Varied
Product Designation (OPN):	AXX
Luminous Transmittance:	33%
Date of Revision:	10/01/10
Edited by:	David W. Bothner


Graphs represent nominal filter characteristics

L-Rating


720-820 D LB5
720-810 I LB7
740-810 R LB5
720-810 M LB7
>810-830 M LB5

Optical Density

190-400 nm 6+
720-810 nm 7+
>810-830 nm 5+

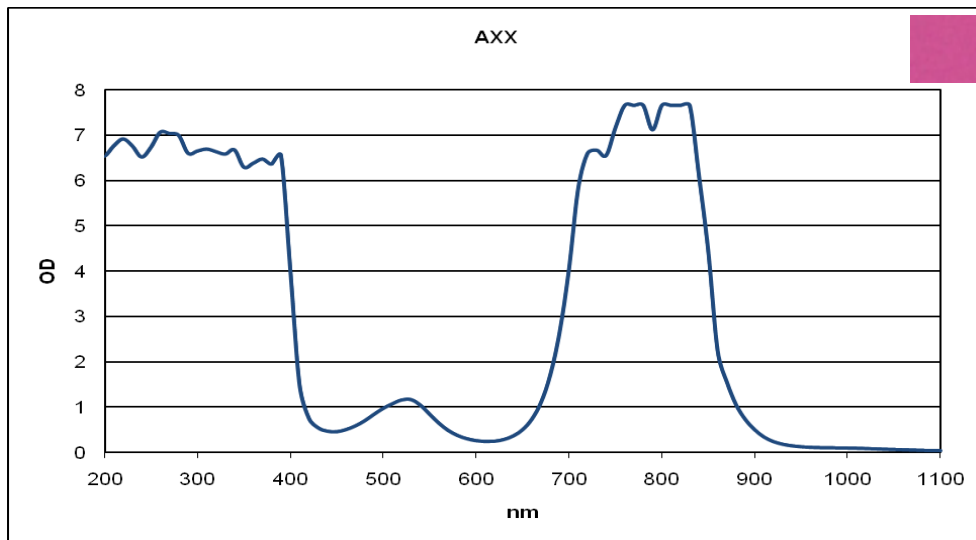


#35 Wrap-Around



#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert



#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.

All LaserShield frames carry a lifetime warranty.