

NoIR


P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield DI2

Customer:	Varied
Product Designation (OPN):	DI2
Luminous Transmittance:	61%
Date of Revision:	5/12/11
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

<u>L-Rating</u>	<u>Optical Density</u>
180-315 D LB6 + R LB4	180-390nm 6+
>315-390 D LB4 + R LB6	785-830nm 5+
785-800 + >818-830 D LB4 + I LB5	800-818nm 6+
>800-818 DR LB5 + IM LB6	
10600 DI LB2	

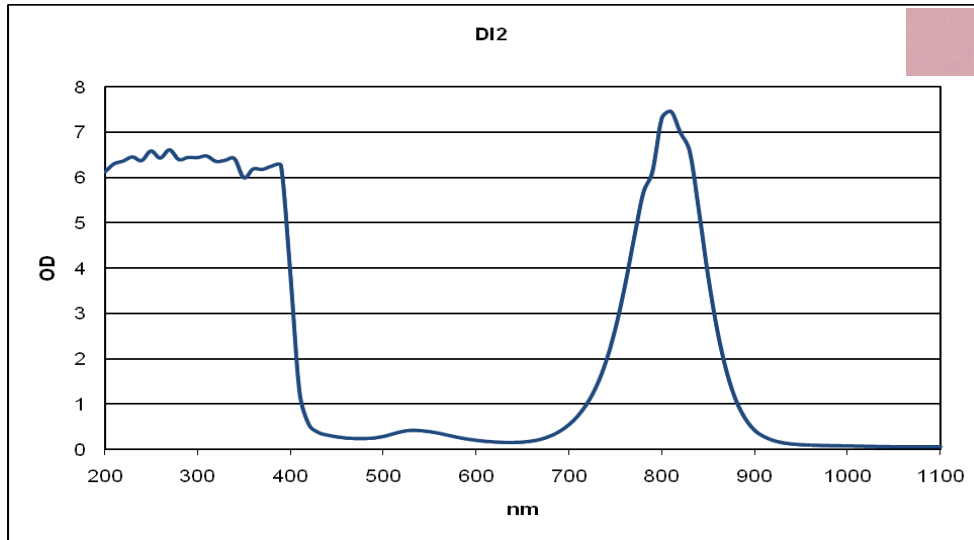


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

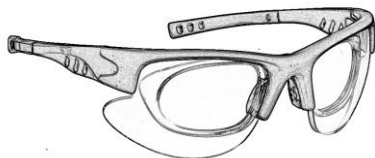

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.