

NoIR


P.O. Box 159 South Lyon Michigan 48178
Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield DI8

Customer:	Varied
Product Designation (OPN):	DI8
Luminous Transmittance:	69%
Date of Revision:	5/12/11
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

<u>L-Rating</u>	<u>Optical Density</u>
180-315 D LB6 + R LB4	190-400nm 5+
>315-400 D LB5 + IR L6	800-830nm 5+
800-830 D LB4 + IR LB5	805-825nm 7+
805-825 D LB5 + IRM LB7	

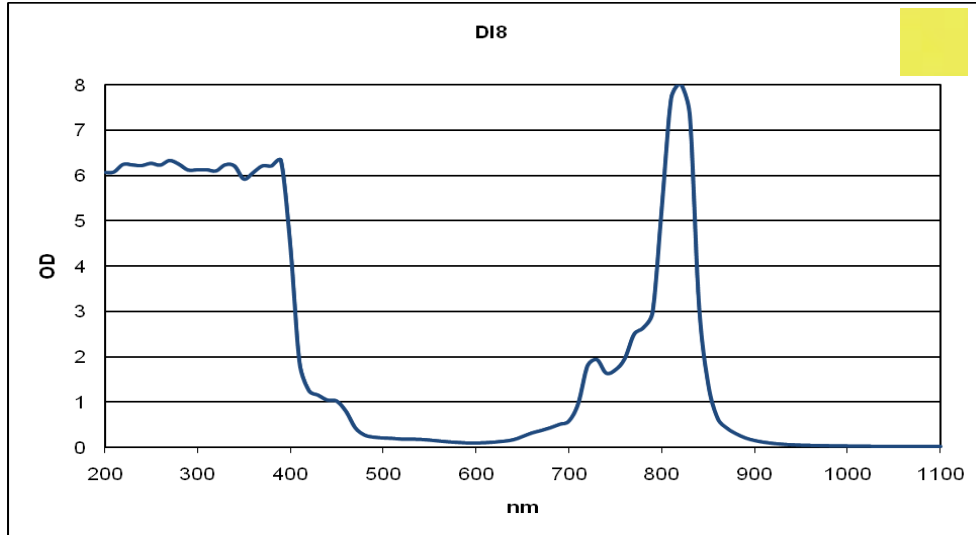


#35 Wrap-Around



#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert



#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
All LaserShield frames carry a lifetime warranty.

AkiTech LEO