

NoIR

P.O. Box 159 South Lyon Michigan 48178
Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com


Product Specification LaserShield ML1

Customer:	Varied
Product Designation (OPN):	ML1
Luminous Transmittance:	45%
Date of Revision:	2/6/12
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

L-Rating
190-315 D LB8 + IR LB4
>315-420 DIR LB5
765-1100 DIRM LB5
790-1080 D LB6 + IRM LB7
950-1085 DIRM LB6
775-1085 D LB5 + IRM LB6

Optical Density
190-420nm + 765-1100nm 5+
775-1085nm 6+
790-1080nm 7+

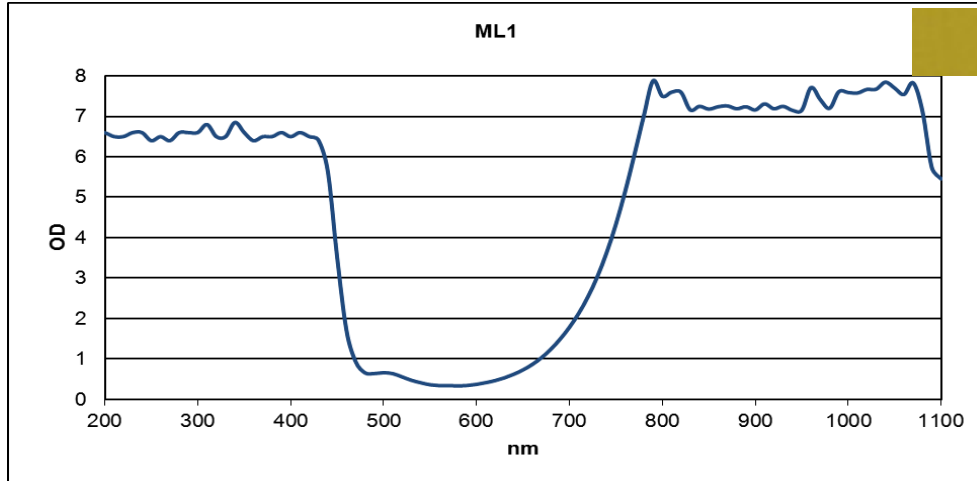


#35 Wrap-Around



#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert



#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
All LaserShield frames carry a lifetime warranty.

AkiTech LEO