

NoIR

P.O. Box 159 South Lyon Michigan 48178
Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com


Product Specification LaserShield ML3

Customer:	Varied
Product Designation (OPN):	ML3
Luminous Transmittance:	16%
Date of Revision:	12/13/10
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

L-Rating
190-315 D LB7 + IR LB4
>315-395 D LB5 + IRM LB6
630-660 + 800-915 DIR LB3
>660-670 + 780-920 DIR LB2

Optical Density
190-400nm 5+
630-660nm 3+
800-915nm 3+
660-670nm 2+
780-920nm 2+

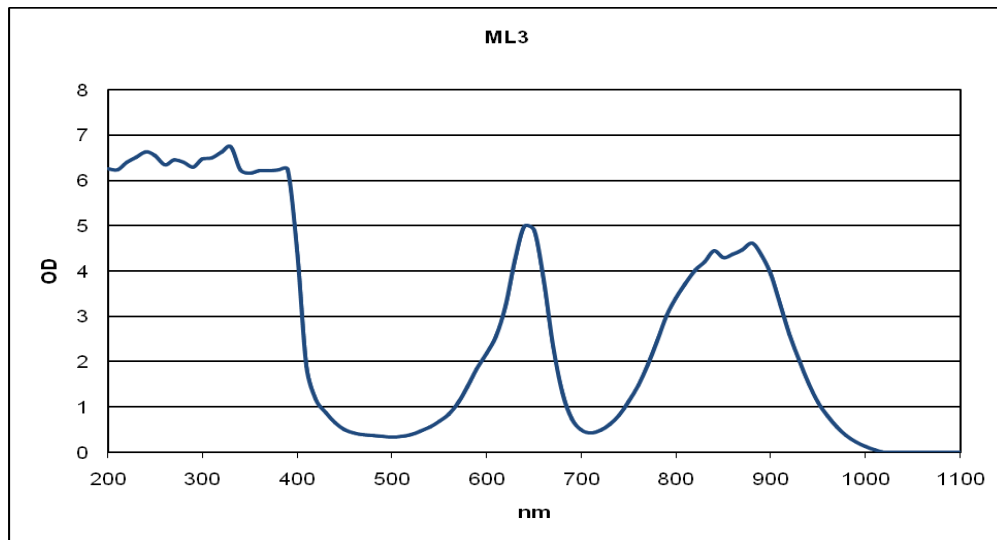


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

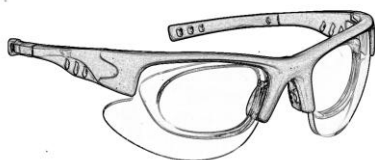

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
All LaserShield frames carry a lifetime warranty.