

NoIR


P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield MLA

Customer:	Varied
Product Designation (OPN):	MLA
Luminous Transmittance:	26%
Date of Revision:	7/27/11
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

<u>L-Rating</u>	<u>Optical Density</u>
190-315 D LB7 + IR LB4	190-400 nm 5+
>315-400 DIRM LB5	525-532nm 1.5+
.01W 2*10 ⁻⁶ J 532 + 630-<636 RB1	633-640nm 1.4+
.1W 2*10 ⁻⁵ J 636-640 RB2	

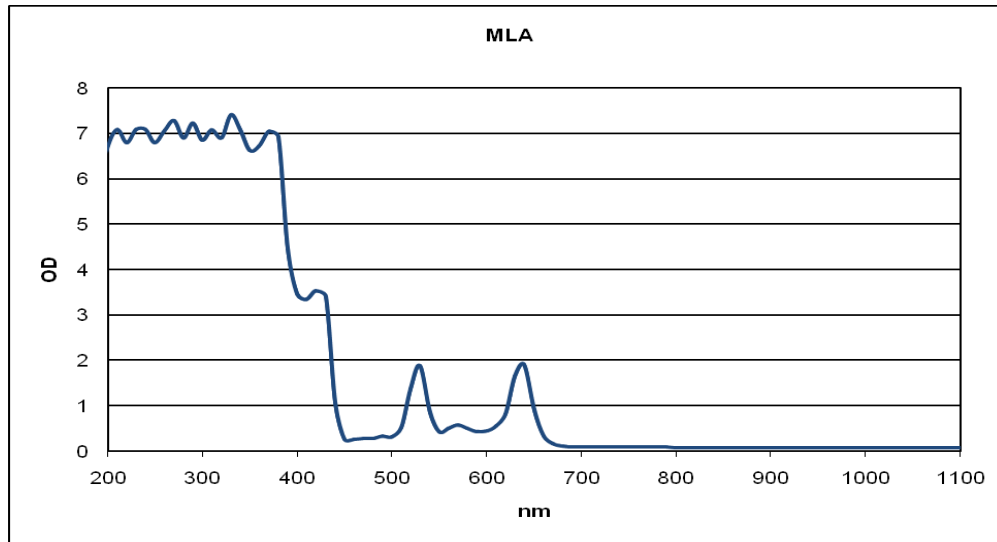


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

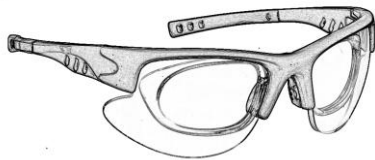

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.