

NoIR

P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield RB2

Customer:	Varied
Product Designation (OPN):	RB2
Luminous Transmittance:	35%
Date of Revision:	5/12/11
Edited by:	David W. Bothner


Graphs represent nominal filter characteristics

L-Rating

180-315 D LB6 + R LB4
>315-400 DR LB4
>615-660 DIR LB3
>660-665 DIR LB4
>665-715 D LB4 + IR LB5
694 IR LB7

Optical Density

190-400nm 6+
615-720 nm 3+
651-670 nm 4+
671-715 nm 5+
680-710 nm 6+
690-700 nm 7+

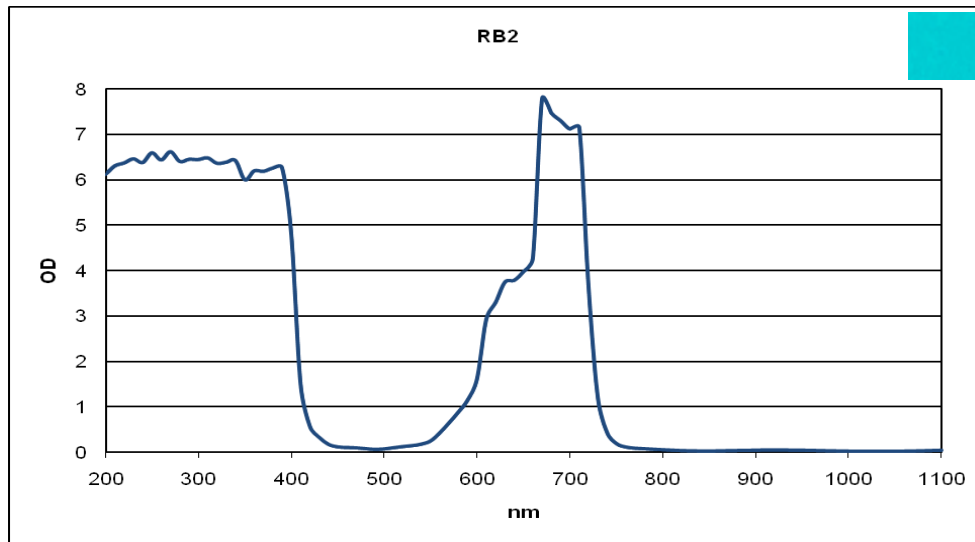


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

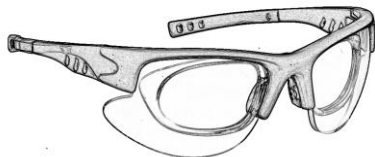

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.