

# NoIR


P.O. Box 159 South Lyon Michigan 48178  
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708  
[www.noirlaser.com](http://www.noirlaser.com)

## Product Specification LaserShield TRI

Customer:	Varied
Product Designation (OPN):	TRI
Luminous Transmittance:	26%
Date of Revision:	12/13/10
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

<u>L-Rating</u>	<u>Optical Density</u>
180-315 D LB7 + IR LB4	180-534nm 7+
>315-400 DIRM LB5	770-850nm 4+
>400-534 D LB5 + IRM LB6	720-770nm 5+
720-770 + >850-1080 DIR LB5	850-1080nm 5+
750-760 + 980-1064 D LB5 + IR LB7	750-760nm 7+
>770-850 DIR LB4	980-1064nm 7+

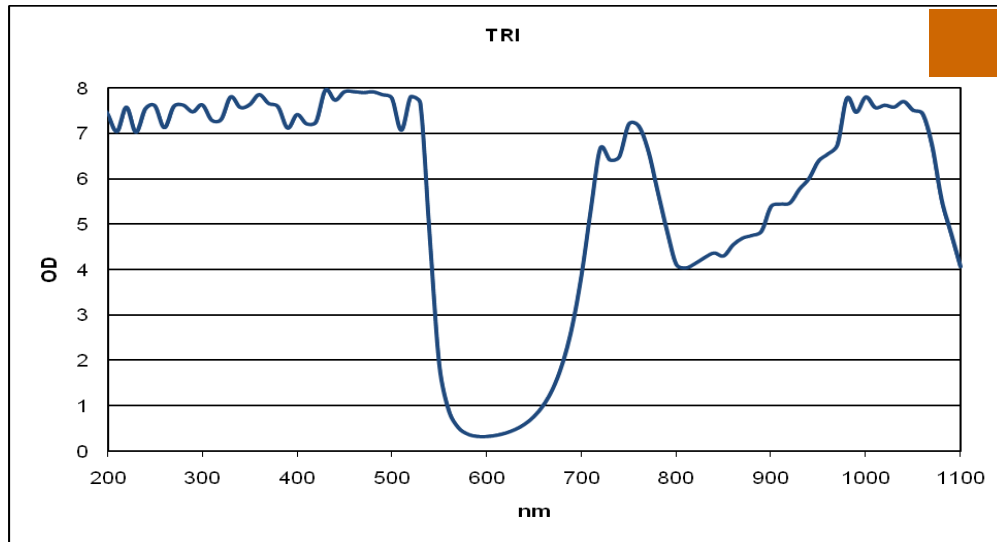



#35 Wrap-Around



#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert



#38 Large Adjustable



#36 Universal Adjustable

Other frame styles available at [www.lasereyeprotection.com](http://www.lasereyeprotection.com).  
 All LaserShield frames carry a lifetime warranty.