

NoIR

P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com


Product Specification LaserShield YPL

Customer:	Varied
Product Designation (OPN):	YPL
Luminous Transmittance:	7%
Date of Revision:	5/12/11
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

L-Rating
 190-390 D LB6 + R LB4
 >315-390 D LB2 + R LB4
 560-950 DIR LB1
 860-1400 D LB4 + I LB5
 >1400-1500 DI LB3
 >950-1070 D LB5 + I LB6

Optical Density
 190-390nm 6+
 560-950 nm 1+
 1064 nm 6+
 1300-1500 nm 4.5+

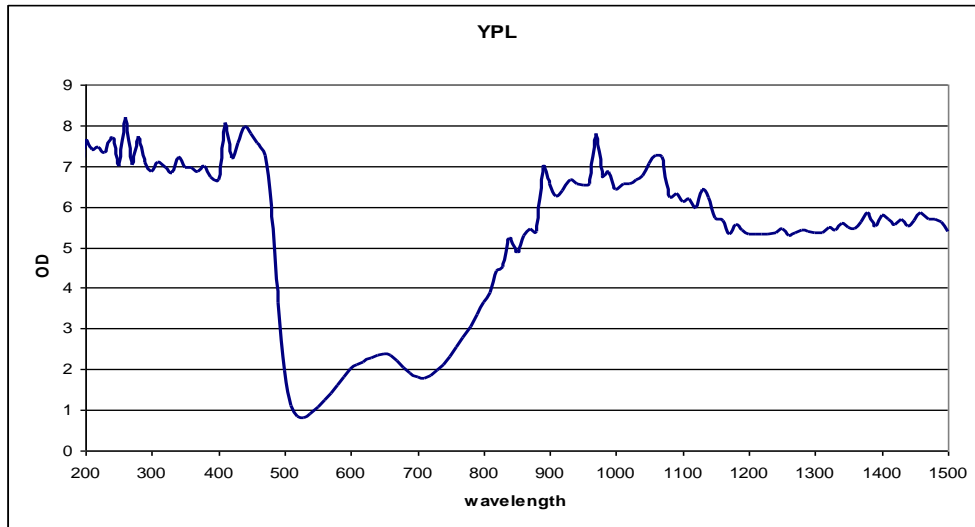


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

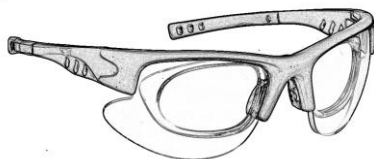

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.

AkiTech LEO