

NoIR

P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708

www.noirlaser.com

Product Specification LaserShield YRB

Customer:	Varied
Product Designation (OPN):	YRB
Luminous Transmittance:	65%
Date of Revision:	12/10/10
Edited by:	David W. Bothner


Graphs represent nominal filter characteristics

L-Rating

190-315 D LB7 + IR LB4
>315-400 DIRM LB5
808-840 DIR LB4
>840-950 D LB4 + IR LB5
>950-1070 D LB4 + IR LB6
2780-2940 DI LB2

Optical Density

190-380 nm 5+
950-1070 nm 7+
808-840 nm 4+
>840-950 nm 5+
2700-2950nm 6+

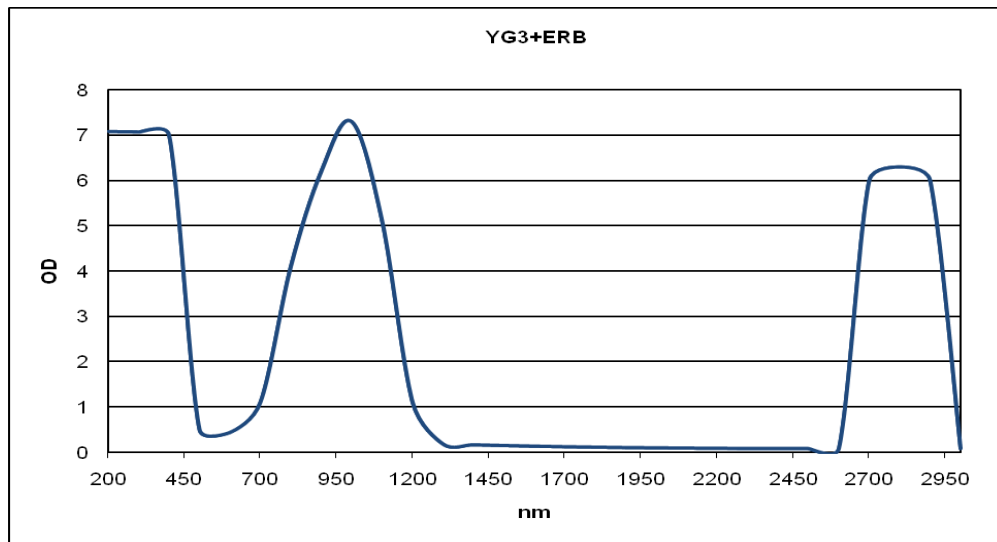


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

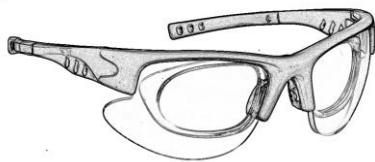

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.

All LaserShield frames carry a lifetime warranty.