

NoIR

P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield ZS1

Customer:	Varied
Product Designation (OPN):	ZS1
Luminous Transmittance:	48%
Date of Revision:	12/13/10
Edited by:	David W. Bothner


Graphs represent nominal filter characteristics

L-Rating


180-315 D LB7 + IR LB4
 >315-390 DIRM LB5
 655-664 D LB4 + IR LB5
 659 D LB5 + IR LB6

Optical Density

190-400nm 6+
 659nm 6+
 655-664 nm 5+

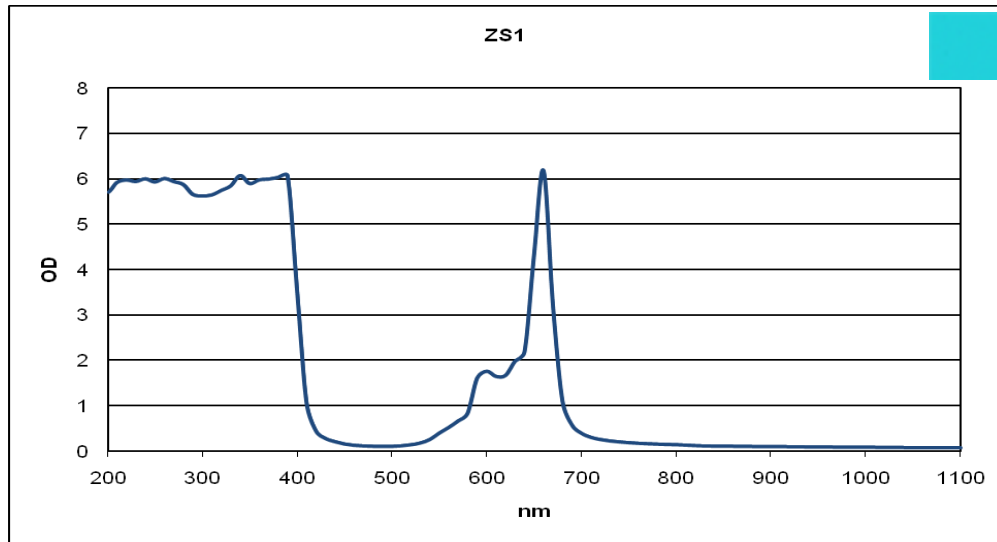


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

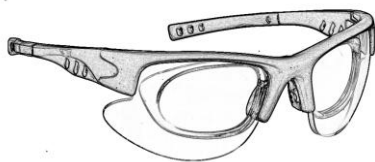

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com