

NoIR


P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield ZSA

| | |
|----------------------------|------------------|
| Customer: | Varied |
| Product Designation (OPN): | ZSA |
| Luminous Transmittance: | 10% |
| Date of Revision: | 12/13/10 |
| Edited by: | David W. Bothner |

Graphs represent nominal filter characteristics

| <u>L-Rating</u> | <u>Optical Density</u> |
|---|------------------------|
| 180-315 D LB7 + IR LB4 | 190-400nm 6+ |
| >315-390 DIRM LB5 | 532nm 3+ |
| 1W 2*10 ⁻⁴ J 532 + 561 + 659 RB3 | 561nm 3+ |
| | 659nm 3+ |
| | 654-664 nm 2+ |

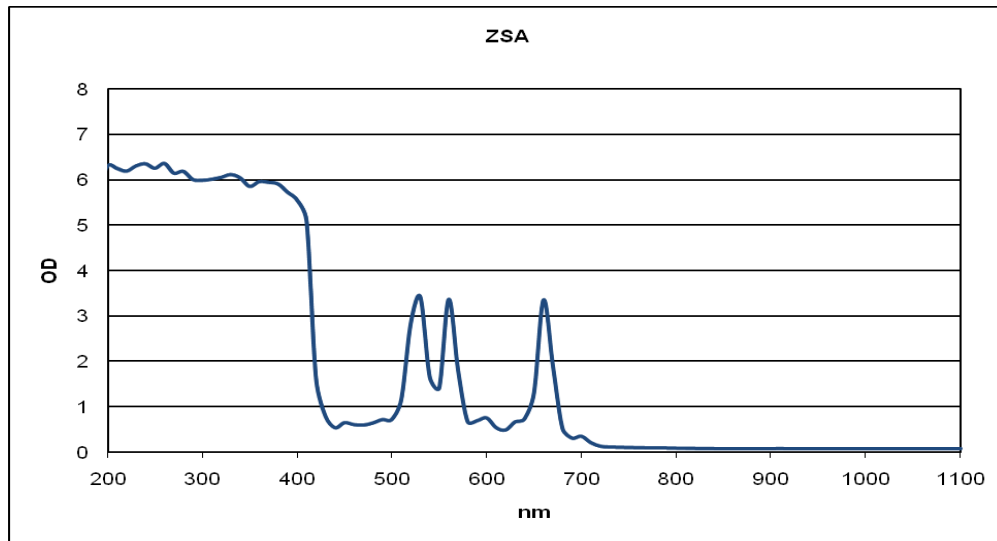


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

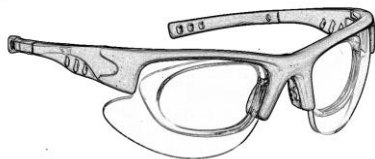

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.